





21600 NORDHOFF ST.
CHATSWORTH, CALIFORNIA 91311 USA
PH: (818) 882-1238
E-Mail: sor@sor.com
Internet: http://www.sor.com

#256-83, #256-85 WILDERNESS ROOF RACK INSTALLATION INSTRUCTIONS

PARTS LIST

Qty 4 - Clamp Assemblies - #9025 (7")
Qty 4 - 3/8 x 1-1/2 Bolts
Qty 4 - 3/8 Thin Nylocks
Qty 4 - 3/8 USS Flatwashers
Qty 4 - Black Thread Covers

1. Remove silver plated lower brackets from clamps.
2. Install roof rack clamps to assembled roof rack, as shown, leave loose for adjustment.
3. With some help, set the assembled roof rack on the vehicle, with the clamps resting in the rain gutter.
4. Center roof rack on vehicle reinstall lower brackets to clamps and tighten all hardware.
5. Install black thread covers over brackets as shown in figure 4.
6. CAUTION!!! LOADING AND WEIGHT CAPACITY. Use common sense when loading items on this roof rack. The roof rack will support more weight than the vehicle roof mounting will safely support. Use manufacturers weight limits as a guide for loading this roof rack.

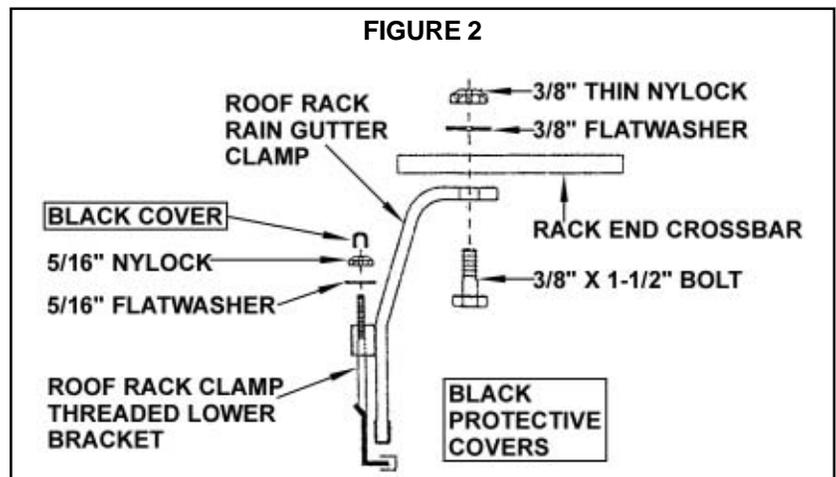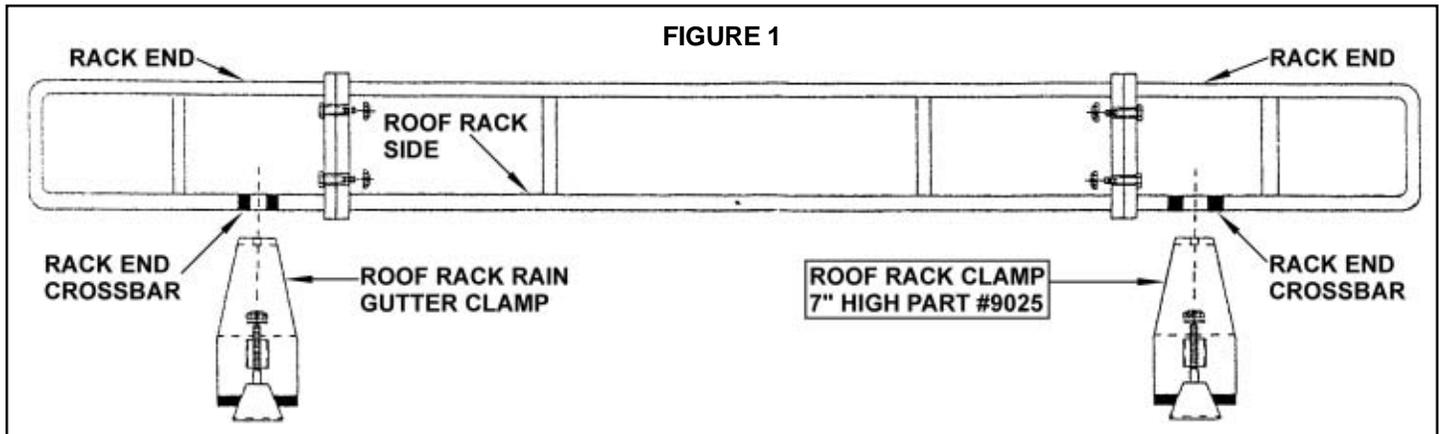

Manufactured By Garvin Industries
316 Millar Ave.
El Cajon, CA 92020
Ph: 619-440-7415
Part #28006